

RIVER MURRAY FLOW REPORT and WATER RESOURCES UPDATE

Public I2 A2

Report #17/2019

Issued 10:00 am 10 May 2019

This supersedes the previous flow report issued by the Department for Environment and Water (DEW) on 3 May 2019. The next report will be provided on Friday 17 May 2019.

In this report, for ease of representation, large volumes of water are expressed in gigalitres (GL), while smaller volumes are expressed in megalitres (ML). One GL is equal to 1 000 ML.

WATER ALLOCATION SUPPORT DROP-IN SESSIONS

Two drop-in sessions this May are available for irrigators to help prepare for the 2019-20 water use year. These drop-in sessions will include Department for Environment and Water staff available to discuss the current water resources outlook, the private carryover policy, water allocation projections and water licensing matters. Other service providers, including water brokers and counsellors are being invited to provide further support and answer your questions.

The two drop-in sessions will be **Monday 20th of May, 11 am to 3 pm at the Loxton Research Centre** then **Wednesday 22nd of May, 9 am to 12 pm at the Murray Bridge Golf Club**. RSVP is not needed, you can drop-in within those times when suits you. For more information please contact Ms Peta Brettig, Senior Project Officer River Murray WAP on 8463 6877 or rmwap.feedback@sa.gov.au. Information about these sessions is also on the DEW website.

MANAGEMENT OF SOUTH AUSTRALIA'S DEFERRED WATER

The Murray-Darling Basin Authority confirmed that on 1 May 2019 South Australia had 341.6 GL of deferred water held in storage. The table below identifies the storage in which it is held and the purpose.

At 1 April 2019				
Purpose	Lake Victoria (GL)	Hume (GL)	Dartmouth (GL)	Total (GL)
*CHWN	0.0	6.4	233.1	239.5
Private Carryover	0.0	0.0	102.1	102.1
Total	0.0	6.4	335.2	341.6

*Critical Human Water Needs (CHWN)

Volumes stored are adjusted for net evaporation losses and spills until delivered to South Australia. South Australia is seeking opportunities to defer and store water during 2018-19.

WATER RESOURCES UPDATE

During April 2019, the total River Murray System inflow was approximately 68 GL, which is approximately 26% of the April long-term average of 258 GL. There was no inflow to Menindee Lakes (from the Darling System) during April 2019, compared to the April long-term average of 226 GL.

The flow to South Australia during April 2019 was approximately 190 GL, which is about 62% of the April long-term average of approximately 306 GL. The flow comprised:

- 135 GL of Entitlement Flow (includes environmental water on SA licence);
- plus 43 GL of environmental water;
- plus 12 GL of trade into South Australia.



River Murray Flow Report and Water Resources Update

RAINFALL AND TEMPERATURE OUTLOOK

The latest Bureau of Meteorology weather outlook for May to July 2019 indicates average rainfall with warmer than average temperatures across most of the Murray-Darling Basin. The outlook is influenced by an El Niño Alert. El Niño conditions usually bring drier than normal conditions across the Murray-Darling Basin.

STORAGE VOLUMES

Murray-Darling Basin Storage Volumes

Storage	Full Supply Volume (GL)	7/5/2019 (GL)	7/5/2018 (GL)	Long-term average (end of May) (GL)
Dartmouth	3 856	2 457 (63%)	3 415 (88%)	
Hume	3 003	435 (14%)	936 (31%)	
Lake Victoria	677	180 (26%)	211 (31%)	
Menindee Lakes	*1 731	17 (1%)	229 (13%)	
TOTAL	9 267	3 089 (33%)	4 791 (52%)	5 728 (62%)

*Menindee Lakes can be surcharged to 2 015 GL


WATER QUALITY - Salinity

A number of targets are identified under the Basin Plan, which all Basin States must have regard to in managing River Murray flows. The targets for real-time salinity are identified below. Salinity should not exceed these values for 95% of the time:

- 580 EC at Lock 6
- 800 EC at Morgan
- 830 EC at Murray Bridge
- 1 000 EC at Milang

The following graph shows the salinity at these locations and the flow to South Australia (QSA) from May 2018 to May 2019. The dashed-lines identify the Basin Plan (BP) thresholds for the corresponding colour coded location.

SA River Murray Daily Average Salinity

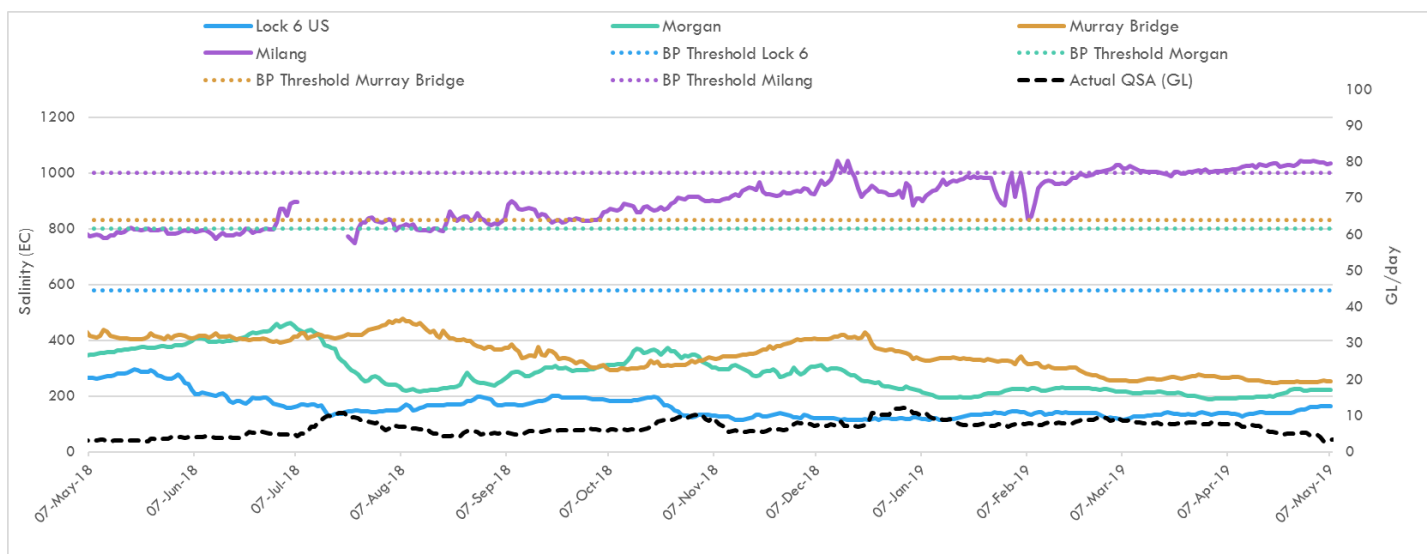

Note: Missing Milang salinity readings periodically during July are due to biofouling at the EC sensor..

FLOW OUTLOOK

The flow at the South Australian border is approximately 3.2 GL/day and will remain at around 3.2 GL/day during the coming week. It comprises:

- normal May Entitlement Flow of 3 GL/day;
- plus environmental water; and
- interstate trade adjustments.

The flow over Lock 1 is approximately 2 GL/day and will remain at around 2 GL/day during the coming week, depending on weather conditions and extractions.

It is important to note that flow forecasts in this advice are based on the information available at the time of preparation. Advice may change as new gauging information becomes available, or due to rainfall events or changed operations upstream.

ENVIRONMENTAL WATER

Environmental water is being provided to South Australia for:

- a range of outcomes at wetlands, mostly in the Riverland via arrangements with the Nature Foundation SA, SA Murray-Darling Basin Natural Resources Management Board, Renmark Irrigation Trust, Ngarrindjeri Regional Authority, Calperum Station and Banrock Station; and
- the Lower Lakes and Coorong to:
 - improve salinity and water quality;
 - manage lake water levels while providing for ongoing releases to the Coorong to support fish condition and enhance foodweb productivity; and
 - maintain a connection between the Lower Lakes and Coorong to allow for fish movement (for further details see *Barrage Operations and Water Levels in the Lower Lakes* section).

Scientists have recently detected a cohort of one year old black bream in the Coorong, which means the fish spawned in summer 2017-18 have survived another year. Commercial fishermen are also reporting that the one year old black bream are widespread throughout the entire Coorong North Lagoon.

MURRAY MOUTH

Dredging operations at the Murray Mouth commenced on 9 January 2015 to maintain connectivity (exchange of water) between the Coorong and the Southern Ocean.

Two dredges are operating 24/7 in the Goolwa and Tauwitchere channels. At 5 May 2019, a total of approximately 4 343 517 cubic metres of sand had been removed by dredging operations. Barrage releases combined with dredging have helped to maintain connectivity of the Murray Mouth.

There are a number of shallow zones in and adjacent to the Murray Mouth. Mariners should use caution when traversing the mouth area, follow all directions, reduce speed and avoid travelling at low tide. Mariners equipped with echo sounders should check depths regularly. Navigation through the Murray Mouth is only permitted during daylight hours. Exclusion Zones established around the dredging operations are in place to ensure public safety. Refer to Notice to Mariners No 42 of 2016 [Notice 42](#).

There is a partial park closure in place for the northern tip of the Coorong National Park. For more information visit [Coorong partial park closure notice](#)

BARRAGE OPERATIONS AND WATER LEVELS IN THE LOWER LAKES

The water level in Lake Alexandrina is approximately 0.51 m AHD and Lake Albert is approximately 0.62 m AHD. The difference in water level is due to wind effects. Where possible, water levels are being managed to maintain a water level of above 0.55 m AHD by the end of May 2019.

During the week ending 7 May 2019 total barrage releases were approximately 2.6 GL. All fishways remain open. During adverse weather conditions SA Water will operate the barrages to minimise the risk of seawater entering Lake Alexandrina, therefore minimising any negative salinity impacts from reverse flow events.

Water levels and barrage operations are monitored closely by the South Australian Government, Murray-Darling Basin Authority and Commonwealth Environmental Water Office.

RUN-of-RIVER SALINITY SURVEY

DEW will undertake its annual Run-of-River Salinity Survey from 6 May to 24 May.

The annual surveys have collected salinity data since 1985 to provide detailed information on salt volumes entering the River Murray. If the right conditions are available, the surveys are undertaken in the low Entitlement Flow months (below 3.5 GL/day), of May and June. The results of the surveys have provided detailed information on salt inflows to the river. This information is important for assessing the performance of Salt Interception Schemes. The survey collect salinity and locality data at five second intervals along a river reach, repeated daily over five consecutive days. This survey will be undertaken:

- Between Lock 7 and Lock 5 (6-10 May)
- Between Lock 5 and Lock 3 (13-17 May)
- Between Lock 3 and Lock 1 (20-24 May)

NAVIGATION ISSUES

Sandbars in the vicinity of the Murray Mouth may cause navigation hazards. Mariners are advised to navigate with caution when operating in the area. Sandbars are also present along sections of the River Murray downstream of Locks 7 and 8 and in South Australia. All Mariners should be aware of the risk of submerged navigation hazards, and should regularly check river depth.

RIVERINE RECOVERY CONSTRUCTION WORKS

The Riverine Recovery Project is constructing environmental regulators to manage a number of wetlands between Mannum and Murtho. Construction is expected to be completed around June 2019.

SA RIVERLAND FLOODPLAINS INTEGRATED INFRASTRUCTURE PROGRAM CONSTRUCTION WORKS

Katarapko

Construction works on the Katarapko Floodplain and are expected to be completed by mid-2020. As a result, some parts of the Murray River National Park will be temporarily closed for camping and other recreational activities. See the link for temporary park closure map [Caring for Katarapko](#)

For safety reasons, the following water access restrictions apply to river vessels and people (other than authorised personnel) until late March 2020:

1. Sawmill Creek, the entire length between Katarapko Creek and Eckert's Creek; and
2. Eckert's Creek, for 1.3 kilometres upstream of the confluence point with Katarapko Creek (ie *The Splash*).

The construction works will enable over 1120 hectares of floodplain to be inundated more regularly to improve ecological health and resilience. For more information, or to receive regular updates, about the Katarapko Floodplain Project please contact the Department for Environment and Water's Engagement Officer, Ms Ellee Eleftheriadis on 8595 2148 or email ellee.elftheriadis2@sa.gov.au

Pike

A second community tour of the Pike floodplain on Sunday May 19 is now booked out. If you would like to be informed of future tours or wish to be added to the mailing list for our new Pike newsletter please phone Ellee Eleftheriadis on 8595 2148 or email ellee.elftheriadis2@sa.gov.au

Regulating structures and a blocking bank on the Pike Floodplain are expected to be completed by December 2019. During the construction period, vessels and persons other than those participating in the works are prohibited from entering the Pike River near the Rumpagunyah Creek and Tanyaca Creek junction, downstream of the Mundic Creek junction. The works will enable a portion of the floodplain to be inundated more regularly to improve ecological health and fish to move freely between the River Murray and the floodplain.

NEW REQUIREMENTS FOR WATER METERS INSTALLED AFTER 1 JULY 2019

Water licence holders are encouraged to familiarise themselves with upcoming changes to metering licensed water use. These changes mean that **from 1 July 2019 new or replacement meters** must comply with national metering standards for meter selection, installation and maintenance. The requirement is for meters installed after 1 July 2019 to be:

- pattern approved;
- validated following installation by a certified person; and
- maintained in accordance with national metering standards.

Existing **meters (installed prior to 1 July 2019) do not need to comply** with the new metering requirements. These meters must continue to comply with the *South Australian Licensed Water Use Meter Policy and Specification*. For further details, next steps and links to key documents and Frequently Asked Questions visit [New metering requirements](#) or contact the Berri Water Licensing Office on (08) 8595 2053.

RIVER MURRAY WATER LEVELS

Below is a table of River Murray water levels at a number of locations from Lock 10 to Murray Bridge.

River Murray Water Levels

Location	River km	Normal Pool Level (m AHD)	Current Level 8/5/2019 (m AHD)	1974 Flood Level (m AHD)	1993 Flood Level (m AHD)	2016 High Water Level (m AHD)
Lock 10	825.0	30.80	30.80	33.81	33.32	32.72
Lock 9 Kulnine	764.8	27.40	27.40	30.03	29.44	28.85
Lock 8 Wangumma	725.7	24.60	24.60	27.60	27.19	26.85
Lock 7 Rufus River	696.6	22.10	22.10	25.70	25.24	24.97
Lock 6 Murtho	619.8	19.25	19.25	21.03	20.50	20.19
Renmark	567.4	-	16.33	18.54	18.04	17.44
Lock 5	562.4	16.30	16.32	18.07	17.50	17.05
Lyrup	537.8	-	13.25	16.85	16.26	15.80
Berri	525.9	-	13.23	15.81	15.74	15.21
Lock 4	516.2	13.20	13.23	15.65	15.08	14.73
Loxton	489.9	-	9.96	15.05	14.12	13.54
Cobdogla	446.9	-	9.84	13.44	12.38	11.59
Lock 3	431.4	9.80	9.81	13.16	12.02	10.98
Overland Corner	425.9	-	6.22	12.73	11.58	10.41
Waikerie	383.6	-	6.18	11.26	10.24	9.20
Lock 2	362.1	6.10	6.14	10.28	9.30	8.32
Cadell	332.6	-	3.34	9.17	8.08	7.01
Morgan	321.7	-	3.29	8.85	7.65	6.38
Lock 1 Blanchetown	274.2	3.20	3.23	6.81	5.38	4.46
Swan Reach	245.0	0.75	0.61	6.06	4.51	3.11
Mannum PS	149.8	0.75	0.62	3.15	1.90	1.33
Murray Bridge	115.3	0.75	0.55	2.06	1.26	1.04

Note that the above water levels may be affected by local wind conditions

FURTHER INFORMATION

The WaterConnect website is South Australia's comprehensive water information portal. For real-time data (like salinity, water levels) go to the following page:

[WaterConnect Real-time water data](#)

Up-to-date River Murray salinity, flow and water level information can be accessed at the Department for Environment and Water, SA Water and Murray-Darling Basin Authority websites

- [Water allocation and carryover announcements](#)
- [River Murray real-time water data](#)
- [SA Water River Murray info - levels, flows etc.](#)
- [Murray-Darling Basin real-time water data](#)

The latest news, information and announcements about the River Murray and Basin Plan are available at [River Murray Update](#).

The Department for Environment and Water has published a series of inundation maps for the River Murray. They are available at [River Murray Inundation Maps](#)

Information on the management of acid drainage water in the Lower River Murray can be accessed at [Acid drainage water LMRIA](#)

Details of river height and rainfall information in the River Murray within Victoria and New South Wales are available at the Bureau of Meteorology website

[Victoria rainfall and river conditions](#)

[NSW rainfall and river conditions](#)

Information provided by the Commonwealth Environmental Water Office can be accessed at [CEWH Environmental Watering](#)

Information on The Living Murray can be accessed at [MDBA TLM](#)

Chowilla Floodplain Icon Site management [Chowilla-floodplain](#)

Department for Environment and Water [Home page](#)

Information provided by the Department of Planning, Transport and Infrastructure on boat licences, registering motor boats, owning and operating water craft, and boat and marine safety can be accessed at

[Boating and marine](#)

ID	RM-Flow-Report 20190510
Classification	Public I2 A2
Issued	10 May 2019
Authority	DEW
Master Document Location	R:\Water Group\RMO\WRO\04 Communications\Flow Advices\2018-19
Managed and Maintained by	River Murray Operations
Author	River Murray Operations
Reviewer	A/Director, River Murray Operations, Water Group